

1600 Inch Series


Inner Dimension = Boundary dimensions (mm)

Outer Dimension = Boundary dimensions (mm)

Width = Boundary dimensions (mm)

Dynamic(Cr) = Basic load ratings (Lbf)

Static(Cor) = Basic load ratings (Lbf)

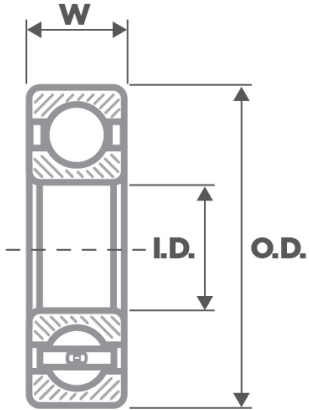

Size	Inner Dimension	Outer Dimension	Width	Dynamic(Cr)	Static(Cor)	Weight(lb)
1601	0.1875	0.6875	0.2500	443	164	0.0041
1602	0.2500	0.6875	0.2500	443	164	0.0064
1603	0.3125	0.8750	0.2813	740	306	0.0095
1604	0.3750	0.8750	0.2813	749	317	0.0086
1605	0.3125	0.9063	0.3125	749	317	0.0168
1606	0.3750	0.9063	0.3125	749	317	0.0218
1607	0.4375	0.9063	0.3125	605	286	0.0222
1614	0.3750	1.1250	0.3750	881	506	0.0350
1615	0.4375	1.1250	0.3750	881	506	0.0340
1616	0.5000	1.1250	0.3750	881	506	0.0300
1620	0.4375	1.3750	0.4375	1326	787	0.0500
1621	0.5000	1.3750	0.4375	1326	787	0.0480
1622	0.5625	1.3750	0.4375	1326	787	0.0400
1623	0.6250	1.3750	0.4375	1326	787	0.0480
1628	0.6250	1.6250	0.5000	1630	787	0.0720
1630	0.7500	1.6250	0.5000	1630	1000	0.0650
1633	0.6250	1.7500	0.5000	1630	1000	0.0920
1635	0.7500	1.7500	0.5000	1630	1000	0.0850

Size	Inner Dimension	Outer Dimension	Width	Dynamic(Cr)	Static(Cor)	Weight(lb)
1638	0.7500	2.0000	0.5625	2428	1000	0.1200
1640	0.8750	2.0000	0.5625	2428	1562	0.1120
1641	1.0000	2.0000	0.5625	2428	1562	0.1000
1652	1.1250	2.5000	0.6250	2878	1562	0.2100
1654	1.2500	2.5000	0.6250	2878	1888	0.1900
1657	1.2500	2.5625	0.6875	3709	2383	0.2150
1658	1.3125	2.5625	0.6875	3709	2383	0.2000
